

## Introduction to the DNS

Track E0  
AfNOG workshop  
April 23-27 2007  
Abuja, Nigeria

AfNOG

## Overview

- Goal of this session
- What is DNS ?
- How is DNS built and how does it work?
- How does a query work ?
- Record types
- Caching and Authoritative
- Delegation: domains vs zones
- Finding the error: where is it broken?

AfNOG

## Goal of this session

- We will review the basics of DNS, including query mechanisms, delegation, and caching.
- The aim is to be able to understand enough of DNS to be able to configure a caching DNS server, and troubleshoot common DNS problems, both local and remote (on the Internet)

AfNOG

## What is DNS ?

- System to convert names to IP addresses:  
`www.afnog.org -> 196.216.2.34`
- ... and back:  
`196.216.2.34 -> www.afnog.org`

AfNOG

## What is DNS ?

- Other information can be found in DNS:
  - where to send mail for a domain
  - who is responsible for this system
  - geographical information
  - etc...
- How do we look this information up ?

AfNOG

## Basic DNS tools

- Using the host command:

```
# host www.afnog.org

www.afnog.org is an alias for afnog.org.
afnog.org has address 196.216.2.34

# host 196.216.2.34

34.2.216.196.in-addr.arpa domain name pointer www.afnog.org.
```

AfNOG

## Basic DNS tools


- Try this yourself with other names - first lookup the names below, then do the same for the IP address returned:

www.yahoo.com  
www.nsrc.org

- Does the lookup of the IP match the name? Why?
- Where did the 'host' command find the information?

AfNOG

## How is DNS built ?

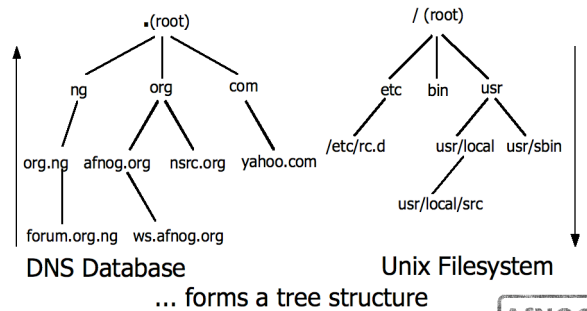

AfNOG

## How is DNS built ?

- DNS is hierarchical
- DNS administration is shared - no single central entity administrates all DNS data
- This distribution of the administration is called *delegation*

AfNOG

## How does DNS work ?

- Clients use a mechanism called a *resolver* and ask servers - this is called a query
- The server being queried will try to find the answer on behalf of the client
- The server functions *recursively*, from top (the root) to bottom, until it finds the answer, asking other servers along the way - the server is *referred* to other servers


AfNOG

## How does DNS work ?

- The client (web browser, mail program, ...) use the OS' *resolver* to find the IP address.
- For example, if we go to the webpage www.yahoo.com:
  - the web browser asks the OS « I need the IP for www.yahoo.com »
  - the OS looks in the *resolver* configuration which server to ask, and sends the query
- On UNIX, /etc/resolv.conf is where the *resolver* is configured.

AfNOG

## A DNS query

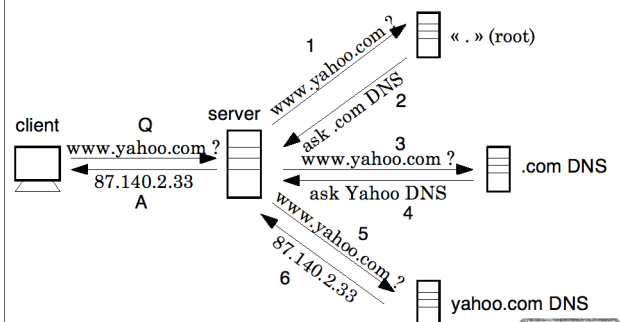

AfNOG

## Query detail with tcpdump

- Let's lookup 'h1-web.hosting.catpipe.net'
- On the server, we do:  

```
# tcpdump -n udp and port 53
```

AfNOG

## Query detail - output

- 1: 18:40:38.62 IP 196.200.216.219.57811 > 192.112.36.4.53: 29030 [1au] A? h1-web.hosting.catpipe.net. (55)
- 2: 18:40:39.24 IP 192.112.36.4.53 > 196.200.216.219.57811: 29030- 0/13/16 (540)
- 3: 18:40:39.24 IP 196.200.216.219.57811 > 192.43.172.30.53: 7286 [1au] A? h1-web.hosting.catpipe.net. (55)
- 4: 18:40:39.93 IP 192.43.172.30.53 > 196.200.216.219.57811: 7286 FormErr- [0q] 0/0/0 (12)
- 5: 18:40:39.93 IP 196.200.216.219.57811 > 192.43.172.30.53: 50994 A? h1-web.hosting.catpipe.net. (44)
- 6: 18:40:40.60 IP 192.43.172.30.53 > 196.200.216.219.57811: 50994- 0/3/3 (152)
- 7: 18:40:40.60 IP 196.200.216.219.57811 > 83.221.131.7.53: 58265 [1au] A? h1-web.hosting.catpipe.net. (55)
- 8: 18:40:41.26 IP 83.221.131.7.53 > 196.200.216.219.57811: 58265\* 1/2/3 A 83.221.131.6 (139)

AfNOG

## Query detail - analysis

- We use a packet analyzer (wireshark / ethereal) to view the contents of the query...

AfNOG

## Finding the root...

- The first query is directed to:  
192.112.36.4 (G.ROOT-SERVERS.NET.)
- How does the server know where to reach the root servers ?
- Chicken-and-egg problem
- Each nameserver has a list of the root nameservers (A - M.ROOT-SERVERS.NET) and their IP address
- In BIND, named.conf

AfNOG

## Using 'dig' to get more details

- the 'host' command is limited in its output - good for lookups, but not enough for debugging.
- we use the 'dig' command to obtain more details
- dig shows a lot of interesting stuff...

AfNOG

## Using 'dig' to get more details

```
ns# dig @147.28.0.39 www.afnog.org. a
; <<> DIG 9.3.2 <<> @147.28.0.39 www.afnog.org
; (1 server found)
; global options: printcmd
; Got answer:
; -->HEADER<<- opcode: QUERY, status: NOERROR, id: 4620
; flags: qr aa rd: QUERY: 1, ANSWER: 1, AUTHORITY: 4, ADDITIONAL: 2
; QUESTION SECTION:
; www.afnog.org.                IN      A
; ANSWER SECTION:
www.afnog.org.                14400   IN      A      196.216.2.4
; AUTHORITY SECTION:
afnog.org.                    14400   IN      NS     rip.psg.com.
afnog.org.                    14400   IN      NS     austin.gh.com.
afnog.org.                    14400   IN      NS     ns-ext.isc.org.
afnog.org.                    14400   IN      NS     ns-sec.ripe.net.
; ADDITIONAL SECTION:
rip.psg.com.                  77044   IN      A      147.28.0.39
austin.gh.com.               14400   IN      A      196.3.64.1
; Query time: 708 msec
; SERVER: 147-28-0-39#53(147-28-0-39)
; WHEN: Wed May 10 15:05:55 2007
; MSG SIZE  rcvd: 182
```

AfNOG

## dig output

- Some interesting fields:
  - flags section: qr aa rd
  - status
  - answer section
  - authority section
  - TTL (numbers in the left column)
  - query time
  - server
- Notice the 'A' record type in the output.

AfNOG

## Record types

- Basic record types:
  - A, AAAA: IPv4, IPv6 address
  - NS: NameServer
  - MX: Mail eXchanger
  - CNAME: Canonical name (alias)
  - PTR: Reverse information

AfNOG

## Caching vs Authoritative

- In the dig output, and in subsequent outputs, we noticed a decrease in query time if we repeated the query.
- Answers are being cached by the querying nameserver, to speed up requests and save network resources
- The TTL value controls the time an answer can be cached
- DNS servers can be put in two categories: caching and authoritative.

AfNOG

## Caching vs Authoritative: authoritative

- Authoritative servers typically only answer queries for data over which they have authority, i.e.: data of which they have a permanent copy, from disk (file or database)
- If they do not know the answer, they will point to a source of authority, but will not process the query recursively.

AfNOG

## Caching vs Authoritative: caching

- Caching nameservers act as query forwarders on behalf of clients, and cache answers for later.
- Can be the same software (often is), but mixing functionality (recursive/caching and authoritative) is discouraged (security risks + confusing)
- The TTL of the answer is used to determine how long it may be cached without re-querying.

AfNOG

## TTL values

- TTL values decrement and expire
- Try repeatedly asking for the A record for www.yahoo.com:  

```
# dig www.yahoo.com
```
- What do you observe about the query time and the TTL ?

AfNOG

## SOA

- Let's query the SOA for a domain:

```
# dig SOA <domain>
...
;; AUTHORITY SECTION:
<domain>. 86400 IN SOA ns.<domain>. root.<domain>.
                200702270 ; serial
                28800     ; refresh
                14400     ; retry
                3600000    ; expire
                86400     ; neg ttl
...
```

AfNOG

## SOA

- The first two fields highlighted are:

- the SOA (Start Of Authority), which the administrator sets to the name of the « source » server for the domain data (this is not always the case)
- the RP (Responsible Person), which is the email address (with the first @ replaced by a '.') to contact in case of technical problems.

AfNOG

## SOA

- The other fields are:
  - serial: the serial number of the zone: this is used for replication between two nameservers
  - refresh: how often a replica server should check the master to see if there is new data
  - retry: how often to retry if the master server fails to answer after *refresh*.
  - expire: when the master server has failed to answer for too long, stop answering clients about this data.
- Why is expire necessary ?

AfNOG

## Running a caching nameserver

- Running a caching nameserver locally can be very useful
- Easy to setup, for example on FreeBSD:
  - add `named_enable="YES"` to `/etc/rc.conf`
  - cd to `/etc/namedb` and run `sh make-localhost`
  - start named:  
`/etc/rc.d/named start`
- What is a good test to verify that named is running ?

AfNOG

## Running a caching nameserver

- When you are confident that your caching nameserver is working, enable it in your local resolver configuration (`/etc/resolv.conf`):

```
nameserver 127.0.0.1
```


AfNOG

## Delegation

- We mentioned that one of the advantages of DNS was that of distribution through shared administration. This is called delegation.
- We delegate when there is an administrative boundary and we want to turn over control of a subdomain to:
  - a department of a larger organization
  - an organization in a country
  - an entity representing a country's domain

AfNOG

## Delegation

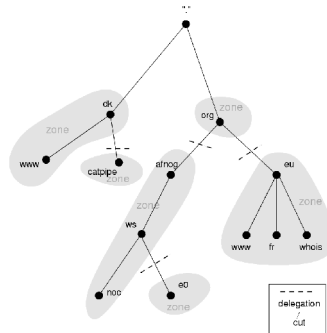


## Delegation: Domains vs Zones

- When we talk about the entire subtree, we talk about *domains*
- When we talk about part of a domain that is administered by an entity, we talk about *zones*

AfNOG

## Delegation: Domains vs Zones

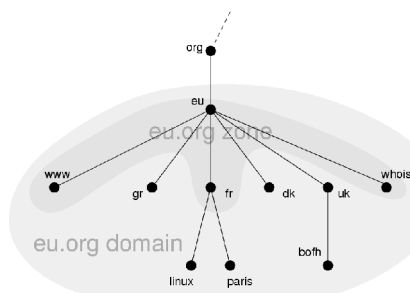

## Finding the error: using doc

- When you encounter problems with your network, web service or email, you don't always suspect DNS.
- When you do, it's not always obvious what the problem is - DNS is tricky.
- A great tool for quickly spotting configuration problems is 'doc'
- /usr/ports/dns/doc - install it now!
- Let's do a few tests on screen with doc...

AfNOG

## Conclusion

- DNS is a vast subject
- It takes a lot of practice to pinpoint problems accurately the first time - caching and recursion are especially confusing
- Remember that there are several servers for the same data, and you don't always talk to the same one
- Practice, practice, practice!
- Don't be afraid to ask questions...

AfNOG

## Questions ?

?

AfNOG